

FASERBETON SCHLANGE OHNE NOPPEN**Description**

Extra strong, snake-shaped fibre-reinforced concrete spacer for lower reinforcement. Only limited suitable for fair-faced concrete.

Application


The spacer is laid diagonally to the reinforcement to ensure the required concrete cover. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Fibre-reinforced concrete
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)


Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

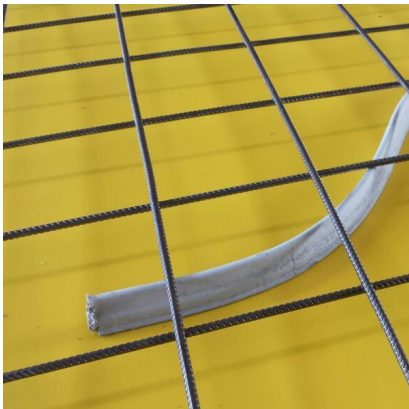

FASERBETON SCHLANGE OHNE NOPPEN

Item no.	Concrete cover mm	Length m	Pcs/ Pallet
FBS2008	20	0,80	2.000
FBS2010	20	1,00	1.500
FBS2508	25	0,80	1.750
FBS2510	25	1,00	1.500
FBS3008	30	0,80	1.500
FBS3010	30	1,00	1.250
FBS3508	35	0,80	1.250
FBS3510	35	1,00	1.000
FBS4008	40	0,80	1.000
FBS4010	40	1,00	750
FBS4508	45	0,80	750
FBS4510	45	1,00	600
FBS5008	50	0,80	600
FBS5010	50	1,00	600
FBS5508	55	0,80	500
FBS5510	55	1,00	500
FBS6008	60	0,80	500
FBS6010	60	1,00	400



For further documents
scan or click here!

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L2/F/T/A.

Nevoga Group

FREILASSING | DE ZNOJMO | CZ BIESIEKIERZ | PL 
 MADE IN EUROPE

info@nevoga.com

www.nevoga.com



All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.

<https://www.nevoga.com/en/product/faserbeton-schlange-ohne-noppen/>

Created: 30.10.2023

Page 2 / 2