DATA SHEET

GIESSBETON 3-PUNKT AUFLAGE - with shuttlecock clip

Description

Spacer with 3-point support made of cast concrete. With shuttlecock clip for easy attachment to the reinforcement. The shuttlecock clip ensures a secure hold at the crossing point of the reinforcement. Due to the low contact points with the formwork, very suitable for exposed concrete.

Application

The spacer is attached to the reinforcement with the shuttlecock clip. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Cast concrete
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants





DATA SHEET

GIESSBETON 3-PUNKT AUFLAGE - with shuttlecock clip

Item no.	Concrete cover mm	For Ø iron mm	Pcs/ Bag	Pcs/ Pallet
GBVA20F	20	4 - 14	384	15.360
GBVA25F	25	4 - 14	384	15.360
GBVA30F	30	4 - 14	320	12.800
GBVA35F	35	4 - 14	256	10.240
GBVA40F	40	4 - 14	192	7.680
GBVA45F	45	4 - 14	147	5.880
GBVA50F	50	4 - 14	147	5.880
GBVA55F	55	4 - 14	147	5.880
GBVA60F	60	4 - 14	144	5.760
GBVA65F	65	4 - 14	108	4.320
GBVA70F	70	4 - 14	72	2.880
GBVA75F	75	4 - 14	72	2.880

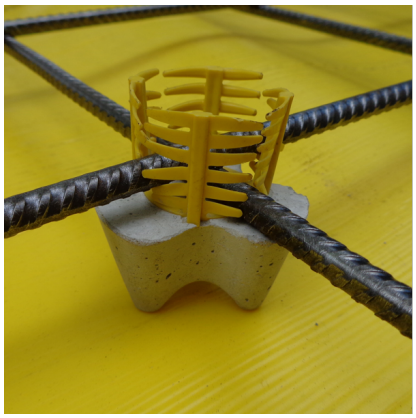

For further documents
scan or click here!

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L2/F/T/A.

Nevoga Group
FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.