DATA SHEET

GEWINDEHÜLSE-PLUS – incl. nail plug for exposed concrete

Description

Corrosion-free plastic anchor made of high-strength polyamide for tie rods with DYWIDAG thread 15 mm. In combination with the Sichtbetonkegel Universal (Item No. SBKU2226GB) also suitable for fair-faced concrete. Delivery including nail plug for fair-faced concrete.
Tested according to DIN 18216:2021-02, test report available on request.

Application

The Gewindehülse-PLUS is attached to the formwork with the nail plug and set in concrete. After stripping the formwork, a formwork anchor with a 15/17 mm thread can be screwed in. The usability of the product in the respective installation situation must be checked by the user!

Material

- Polyamide 6 (PA 6)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

DATA SHEET

GEWINDEHÜLSE-PLUS – incl. nail plug for exposed concrete

Item no.	Length mm	Pcs/ Bag	Pcs/ Pallet
GWHP15/GH	83	100	5.000



Optional fastenings:



SBKU2226GB



SBK22GB



SBK22KS




SST22




ST22

For further documents
scan or click here!

Loosen and unscrew the nail plug, if it does not remain on the formwork during stripping,with an 8 mm Allen key / offset screwdriver in the integrated hexagon socket of the nail plug.

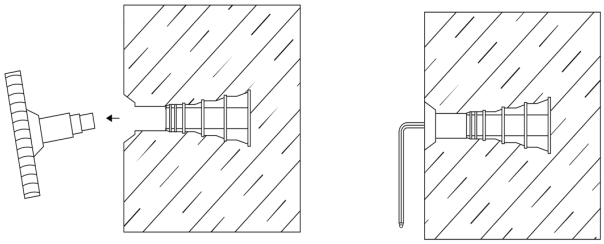

Note: Protect from direct sunlight during storage.



Nevoga Group

FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.