DATA SHEET

RINGABSTANDHALTER - for iron 4 - 12 mm

Description

Plastic wheel spacers for vertical reinforcement.

Application

The spacer is clamped to the vertical reinforcement. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Polyolefin PO (High-density polyethylene HD-PE + Polypropylene PP)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

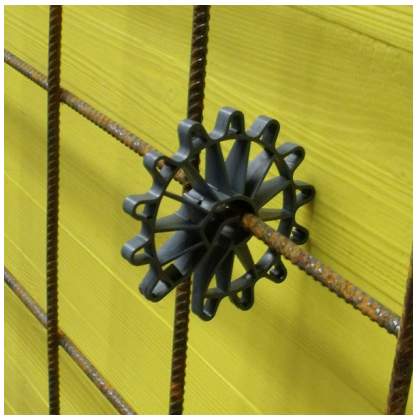

DATA SHEET

RINGABSTANDHALTER - for iron 4 - 12 mm

Item no.	Concrete cover mm	For Ø iron mm	Pcs/ Bag	Pcs/ Big bag	Pcs/ Pallet
R15	15	4 - 10	1.000	5.000	60.000
R20	20	4 - 12	1.000	5.000	50.000
R25	25	4 - 12	500	2.500	30.000
R30	30	4 - 12	500	2.000	20.000
R35	35	4 - 12	200	1.000	12.000
R40	40	4 - 12	125	500	10.000
R50	50	4 - 12	100	500	5.000



For further documents
scan or click here!

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L1/F/A.

Note: Protect from direct sunlight during storage.



Nevoga Group
FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.