DATA SHEET

DRUNTERECK - strong, double, square

Description

Large-area spacer for light reinforcement with very good concrete flow. Pointed feet for minimal contact with the steel formwork - optimal for exposed concrete. Upward facing spikes prevent the reinforcement from slipping.

Application

The spacer is positioned on the formwork, then the reinforcement is placed on the spacer. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Polyolefin PO (High-density polyethylene HD-PE + Polypropylene PP)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

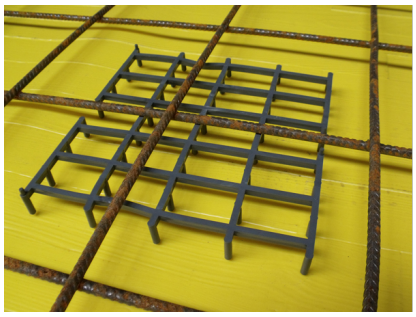

DATA SHEET

DRUNTERECK - strong, double, square

Item no.	Concrete cover mm	Dimension mm	Pcs/ Bundle	Pcs/ Pallet
DEZ15/2Q	15	200 x 200	90	4.320
DEZ20/2Q	20	200 x 200	90	4.320
DEZ25/2Q	25	200 x 200	90	4.320
DEZ30/2Q	30	200 x 200	90	4.320
DEZ35/2Q	35	200 x 200	90	4.320
DEZ40/2Q	40	200 x 200	90	4.320
DEZ45/2Q	45	200 x 200	90	4.320
DEZ50/2Q	50	200 x 200	90	4.320



For further documents
scan or click here!

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L1/F/T/A.

Note: Protect from direct sunlight during storage.



Nevoga Group

FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.