DATA SHEET

SICHTBETONKEGEL UNIVERSAL

Description

Prefabricated cone in high-quality exposed concrete for closing tie holes with an inner diameter of 22 to 26 mm in combination with cones with a fitting length of 10 mm as well as OKTAGON-PLUS 22 or 26. The Sichtbetonkegel Universal is only used to visually close the tie hole and does not provide protection against water under pressure.

Application

After removing the cone, the opening of the formwork spacer is closed with the Sichtbetonkegel Universal. The Sichtbetonkegel Universal only has to be inserted, gluing is not necessary. Do not drive in with a hammer! The usability of the product in the respective installation situation must be checked by the user!

Material

- Cast concrete
- Polypropylene (PP)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

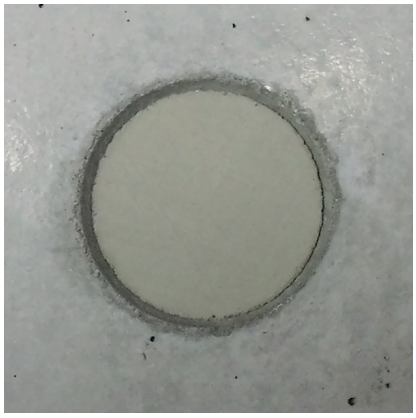

DATA SHEET

SICHTBETONKEGEL UNIVERSAL

Item no.	For tube Ø mm	Pcs/ Box	Pcs/ Pallet
SBKU2226GB	22 - 26	72	3.960



Suitable for tubes with an inner diameter of 22 to 26 mm in combination with cones with a fitting length of 10 mm:







For product video
scan or click here!

For further documents
scan or click here!

Nevoga Group

FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.

https://www.nevoga.com/en/product/sichtbetonkegel-universal/

Created: 30.10.2023