DATA SHEET

FASERBETON EINZELABSTANDHALTER MIT DRAHT - 1.2 mm black wire

Description

Extra strong single spacer made of fibre-reinforced concrete with wire for attachment to reinforcement.

Application

The spacer is attached to the reinforcement with the wires. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Fibre-reinforced concrete
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

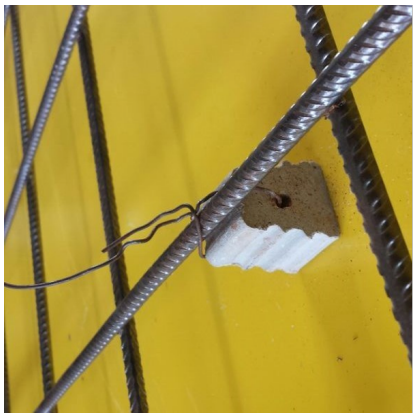

DATA SHEET

FASERBETON EINZELABSTANDHALTER MIT DRAHT - 1.2 mm black wire

Item no.	Concrete cover mm	Cutting width mm	Pcs/ Bag	Pcs/ Pallet
FBETD20	20	22	1.000	50.000
FBETD25	25	22	1.000	40.000
FBETD30	30	25	500	20.000
FBETD35	35	25	500	20.000
FBETD40	40	25	500	20.000
FBETD45	45	25	250	10.000
FBETD50	50	28	250	10.000
FBETD55	55	28	200	8.000
FBETD60	60	28	200	8.000
FBETD65	65	28	125	5.000
FBETD70	70	28	125	5.000
FBETD75	75	28	125	5.000
FBETD80	80	35	75	3.000
FBETD85	85	35	75	3.000
FBETD90	90	35	75	3.000
FBETD95	95	40	60	2.400
FBETD100	100	40	60	2.400



For further documents
scan or click here!

Galvanised wire on request.
Tested according to DBV leaflet „Abstandhalter“ DBV - c - L2/F/T/A.

Nevoga Group
FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.