# DATA SHEET

## FLÄCHENABSTANDHALTER

**Description**

Large-area spacer for light reinforcement with very good concrete flow.

**Application**

The individual rings with diameters between 150 mm and 400 mm are cut out by hand from the set of 12 rings and placed on the formwork. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

**Material**

- Polyolefin PO (High-density polyethylene HD-PE + Polypropylene PP)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

**Packaging**

- Free of halogen-containing compounds, azo dyes, flame retardants

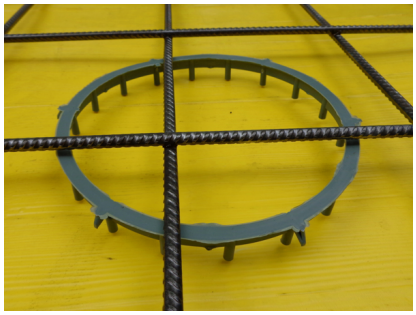

# DATA SHEET

## FLÄCHENABSTANDHALTER

| Item no. | Concrete cover mm | Set/ Bag | Pcs/ Bag | Pcs/ Pallet |
|---|---|---|---|---|
| FA15 | 15 | 25 | 300 | 7.200 |
| FA20 | 20 | 25 | 300 | 4.800 |
| FA25 | 25 | 25 | 300 | 4.800 |
| FA30 | 30 | 25 | 300 | 4.800 |
| FA35 | 35 | 25 | 300 | 4.800 |



For further documents
**scan or click here!**

12 rings per set: smallest Ø 150 mm, largest Ø 400 mm.
Tested according to DBV leaflet „Abstandhalter“ DBV - c - L1/F/T/A.

Note: Protect from direct sunlight during storage.



**Nevoga Group**
FREILASSING | DE
ZNOJMO | CZ
BIESIEKIERZ | PL

MADE IN EUROPE info@nevoga.com www.nevoga.com

All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.

**https://www.nevoga.com/en/product/flachenabstandhalter/**

Created: 30.10.2023