

DRUPAK "1" - wave on top, plugged

Description

Large-area and extra strong spacer, mainly for lower reinforcement. Extra good concrete flow because of large side and top cut-outs. The wave support at the top prevents the reinforcement from slipping. Only possible with Drupak "1". Only limited suitable for fair-faced concrete and prefabricated slabs. Due to the better tilting stability, we recommend Drupak "2" from a concrete cover of 40 mm. Can be extended as required with plug-in coupling, production length 1 m.

Application


The spacer is laid diagonally to the reinforcement to ensure the required concrete cover. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

Material

- Polyolefin PO (High-density polyethylene HD-PE + Polypropylene PP)
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

Packaging

- Free of halogen-containing compounds, azo dyes, flame retardants

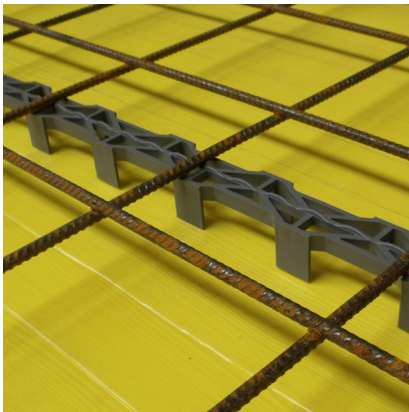

DRUPAK "1" - wave on top, plugged

Item no.	Concrete cover mm	Width mm	Length m	m/ Bundle	m/ Pallet
DPW15/100	15	36	1,00	50,00	3.000,00
DPW15/200	15	36	2,00	100,00	6.000,00
DPW20/100	20	36	1,00	50,00	3.000,00
DPW20/200	20	36	2,00	100,00	6.000,00
DPW25/100	25	36	1,00	50,00	2.700,00
DPW25/200	25	36	2,00	100,00	5.400,00
DPW30/100	30	36	1,00	50,00	2.700,00
DPW30/200	30	36	2,00	100,00	5.400,00
DPW35/100	35	36	1,00	30,00	2.400,00
DPW35/200	35	36	2,00	60,00	4.680,00
DPW40/100	40	36	1,00	30,00	2.160,00
DPW40/200	40	36	2,00	60,00	4.320,00
DPW50/100	50	36	1,00	30,00	1.800,00
DPW50/200	50	36	2,00	60,00	3.600,00




For further documents
scan or click here!

Available standard lengths: 1.00 m and 2.00 m.

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L2/F/A.

Packaging:

- Due to its special design, the Drupak is ideal for stacking, which results in optimal freight cost savings and storage space utilisation.
- Storage of 3 pallets on top of each other is possible without any problems.
- Up to 78 % more on the pallet compared to Drunterleisten.



Note: Protect from direct sunlight during storage.



DRUPAK "1" - wave on top, plugged**Nevoga Group**FREILASSING | DE ZNOJMO | CZ BIESIEKIERZ | PL  **MADE IN EUROPE**

info@nevoga.com

www.nevoga.com



All information has been prepared to the best of our knowledge and according to the current state of the art. However, Nevoga does not guarantee the accuracy and completeness of the information. This data sheet is updated on an ongoing basis. Nevoga therefore reserves the right to make changes without prior notice to the customer. The latest version can be found at www.nevoga.com.

<https://www.nevoga.com/en/product/drupak-1-wave-on-top-plugged/>

Created: 30.10.2023

Page 3 / 3